



KLINGERSIL® C-4438

High performance sealing material at high pressures and temperatures. Indicated for use in water, steam, oils, hydrocarbons, solvents and refrigerant gases.

Material Sealing material with glass fibers, NBR rubber and wire mesh.

Color White / green

Sizes 2000x1500mm | 4000x1500mm


Thicknesses 0,4 mm - 6,4mm



Technical Data - Typical values * thickness for 1.5mm

Compressibility ASTM F 36 A		%	10
Recovery ASTM F 36 A		%	50
Heat loss DIN 52911		%	17
Stress relaxation BS 7531	40Mpa / 300°C	Mpa	26
KLINGER hot compression 50 Mpa	Thickness decrease at 23°C	%	11
	Thickness decrease at 300°C	%	10
Thickness increase after fluid (ASTM F 146)	Oil ASTM N° 3: 5h a 150°C	%	5
	Fuel B: 5h a 23°C	%	5
Weight increase after fluid (ASTM F 146)	Oil ASTM N° 3: 5h a 150°C	%	12
	Fuel B: 5h a 23°C	%	11
Density		g/cm3	1,90

* Reference numbers between allowed value ranges. For information on the value ranges, contact us.

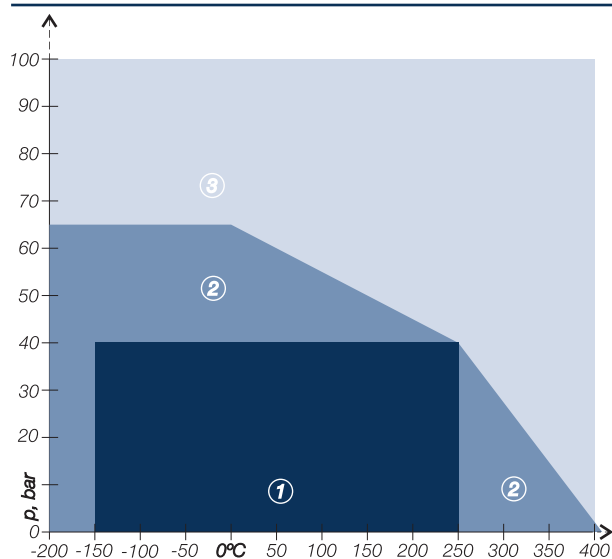

Pressure and Temperature Chart

- ① If the temperature and pressure of your application are in this area, technical assessment is not necessary.
- ② If the temperature and pressure of your application are in this area, a technical assessment is recommended.
- ③ If the temperature and pressure of your application are in this area, a rigorous technical assessment must be carried out.